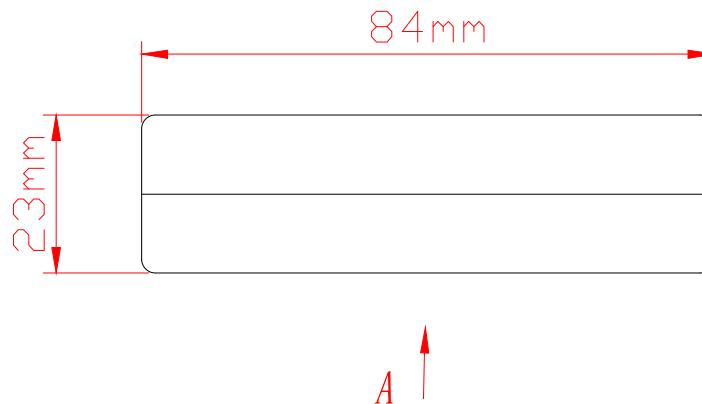


OPEN TOP

TOP

NOTES:

ELECTRICAL:


1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:100 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL:ABS
2. INSERT MATERIAL:FAME RETARDANCY ABS
3. PCB MATERIAL:FR-4 T=1.6mm
4. IDC CONTACT MATERIAL:PHOSPHOR BRONZE T=0.50mm WITH TIN PLATING
5. IDC LIFE:200 TIMES MIN

											
SYM	Number	Bill No.of Alteration	Signature	Date	Material				Item No.	135623	
					Angles Projection	Size	Scale	Unit	Part Name	Cat.6A connection box	
Drawn	Ding jian bo	2015.12.28	Tolerance			A4	X:1	mm	ERP		
Checked	Ge pei jun	2015.12.28	0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00-Angle ±0.25 ±30°								
Approved	Wang wei jun	2015.12.28							Sheet	1 OF 1	Version: A/0