
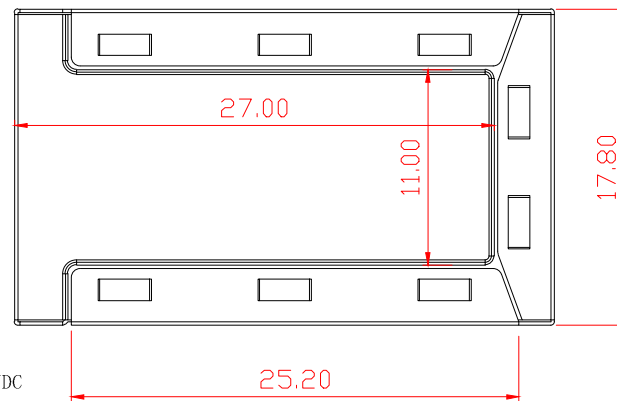
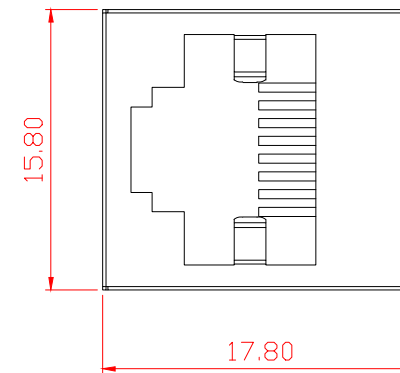


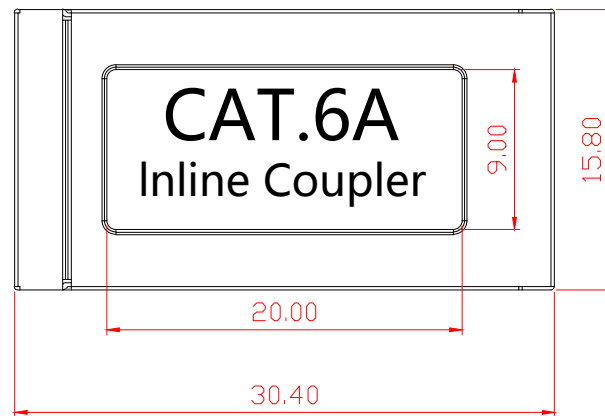

NOTES:

ELECTRICAL:

1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL:SUS304
2. PCB MATERIAL:FR-4 T=1.0mm
3. CONTACT MATERIAL:PHOSPHOR BRONZE
STAMP PIN T=0.30mm
4. RJ45 JACK ;IFE:750 TIMES MIN
5. SHIELD MATERIAL: STAINLESS STEEL,
T=0.2mm

SYM	Number	Bill No. of Alteration	Signature	Date
Drawn	Ding jian bo	2015.12.11	Tolerance	
Checked	Ge pei jun	2015.12.11	$0.00-20.00 \pm 0.10$ $20.00-50.00 \pm 0.15$ $50.00-100.00 \pm 0.20$ $100.00- \pm 0.25$ <i>Angle</i> $\pm 30^\circ$	
Approved	Wang wei jun	2015.12.11		



Material		94V-0 ABS			Item No.	221171
Angles Projection		Size	Scale	Unit	Part Name	Cat.6A Shielded Modular Inline Coupler
		A4	X:1	mm		
Sheet	1 OF 1	Version: A/0			ERP Part No.	