


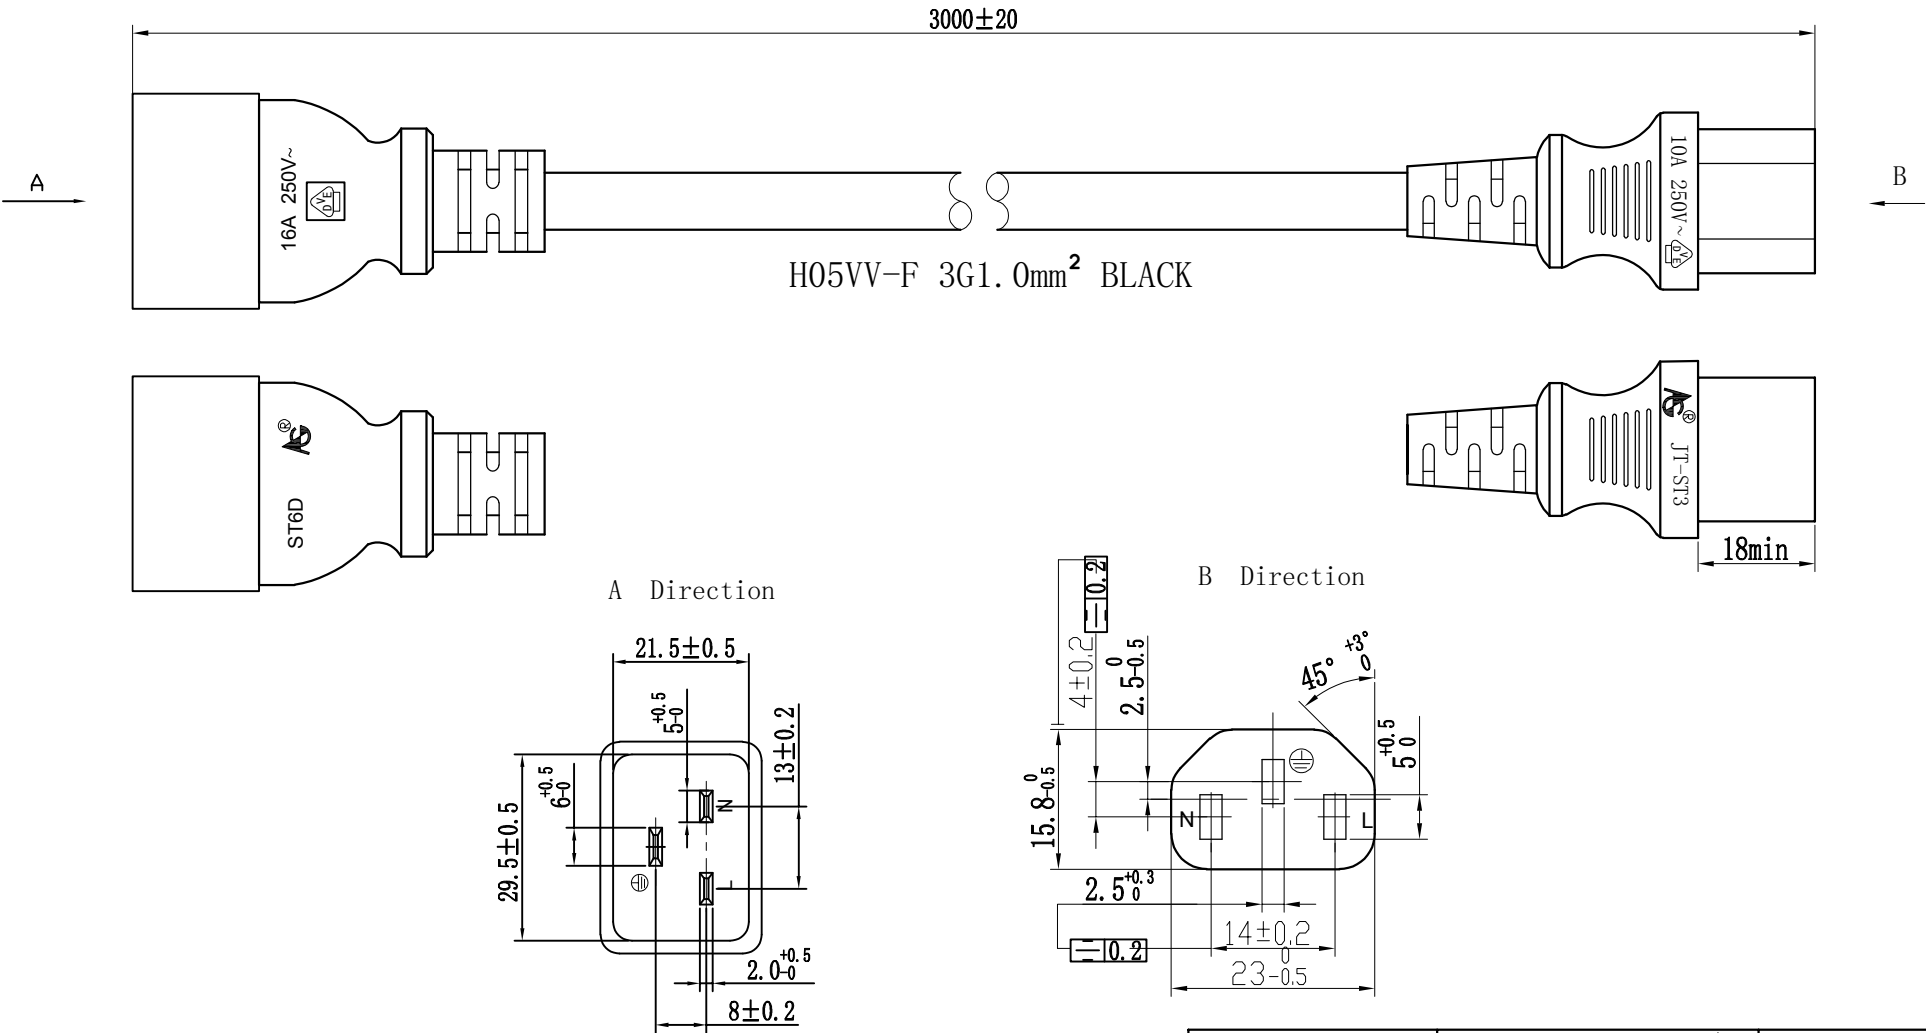

Notes:
1. Plug:ST6D/JT-ST3 Clear injection no scrath and dirt;
2. Cable:H05VV-F 3G1.0mm² Jacket $\phi 7.0 \pm 0.2$ Conductor $32 \times 0.198 \pm 0.004$ Core $\phi 2.6 \pm 0.1$;
Cable Mark: <VDE> H05VV-F 3G1.0mm² ZHEJIANG JINTING NUCLEAR CABLE CO.,LTD
3. Test:Hi-pot:Inner Voltage AC2500V/1S External Voltage AC4000V/1S
current leakage 1mA,insulation resistance no less than 5M Ω ,no strike out;

TOLERANCE ACCORDING TO THIS FORM - UNLESS OTHERWISE SPECIFIED			第三角度投影 THE THIRD ANGLE PROJECTION			第X张 共X张		
尺寸标注 DIMENSION	公差 TOLERANCE	公差 TOLERANCE	版本 VERSION	比例 PROPORTION	比例 PROPORTION	单位 UNIT	mm	张 SHEET
<200	± 0.1	$\pm 0.5^\circ$	图号 FILE LOCATION	A	1:4:1	mm		A4
200~500	± 0.3		图号 FIGURE NO					
500~800	± 0.5		图号 FIGURE NO					
<800	± 1.0		图号 FIGURE NO					
设计 DESIGN			PRODUCTOR NAME		122141			
审核 AUDIT								
批准 APPROVAL								