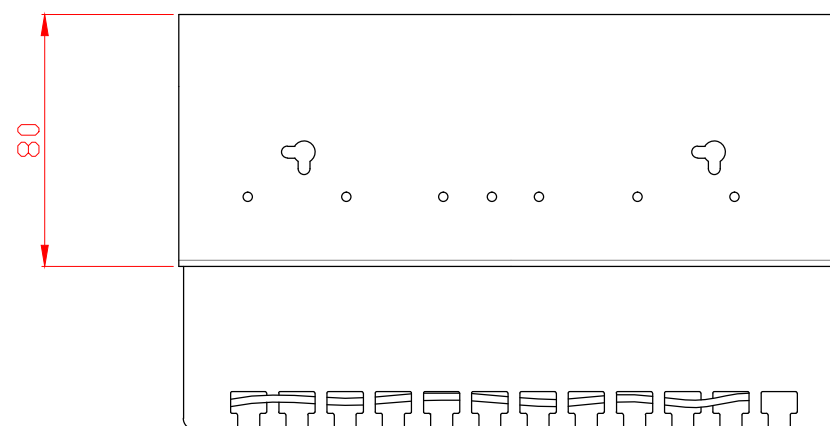
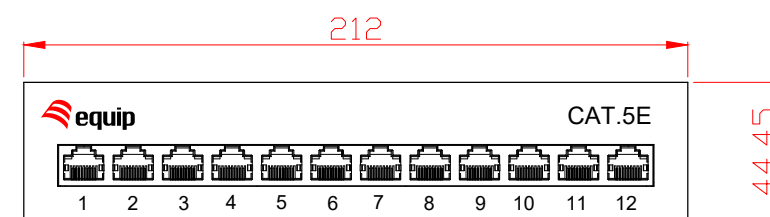
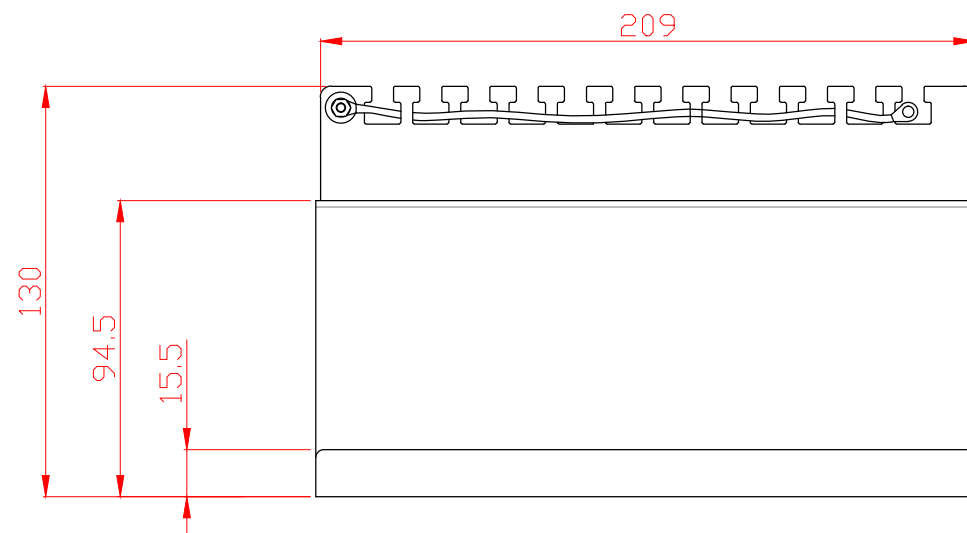


NOTES:

ELECTRICAL:



1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL:PBT;
2. SHIELD MATERIAL: STAINLESS STEEL,
T=0.2mm
3. PANEL FRAME:CARBON STEEL, POWDER,
COATING IN BLACK COLOR, Spcc1.5mm;
4. PCB MATERIAL:FR-4 T=1.6mm ;
5. IDC MATERIAL:PC ,CONTACT:PHOSPHOR BRONZE;
WITH NICKEL PATING;
6. RJ45 JACK LIFE:750 TIMES MIN;
7. IDC LIFE:200 TIMES MIN;
8. WIRE:AWG 22-26;

											
					Material					Item No.	227363
					Angles Projection			Size	Scale	Unit	Part Name 12-Port Cat.6 Desktop Patch Panel
SYM	Number	Bill No. of Alteration	Signature	Date				A4	X:1	mm	
Drawn	Ding jian bo	2016.1.13	Tolerance					A4	X:1	mm	ERP Part No.
Checked	Ge pei jun	2016.1.13	0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20								
Approved	Wang wei jun	2016.1.13	100.00-Angle ±0.25 ±30'								
					Sheet		1 OF 1		Version: A/0		