
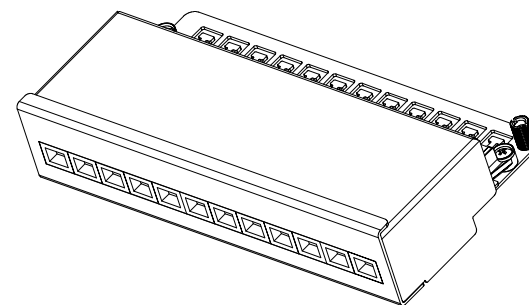
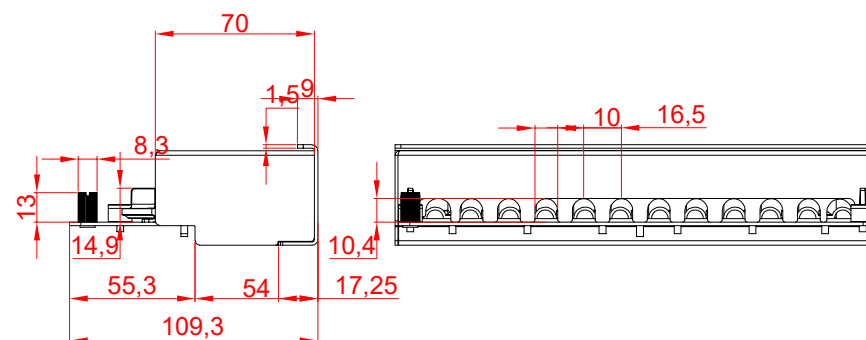
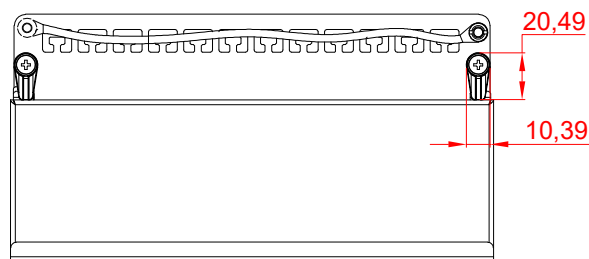
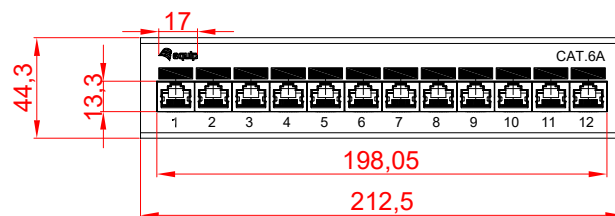


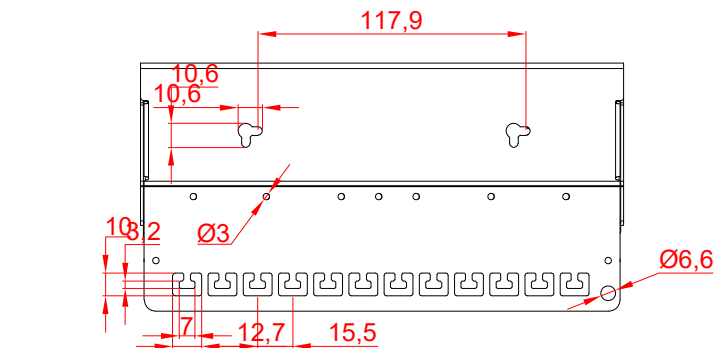

NOTES:

ELECTRICAL:


1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. PANEL FRAME:CARBON STEEL, POWDER, COATING IN BLACK COLOR, Spec1.5mm;
2. PCB MATERIAL:FR-4 T=1.6mm
3. IDC CONTACT MATERIAL:PHOSPHOR BRONZE T=0.50mm WITH TIN PLATING
4. SHIELD MATERIAL: STAINLESS STEEL, T=0.2mm
5. RJ45 JACK LIFE:750 TIMES MIN
6. IDC LIFE:200 TIMES MIN
7. WIRE:AWG 22-26

											
					Material				Item No.	326622	
SYM	Number	Bill No. of Alteration	Signature	Date	Angles Projection		Size	Scale	Unit	Part Name	12 Ports CAT.6A STP Patch Panel
Drawn	Ding jian bo	2015.12.11	Tolerance 0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00- ±0.25 Angle ±30'			A4	X:1	mm	ERP		
Checked	Ge pei jun	2015.12.11							Part No.		
Approved	Wang wei jun	2015.12.11			Sheet	1 OF 1	Version: A/0		Part No.		