
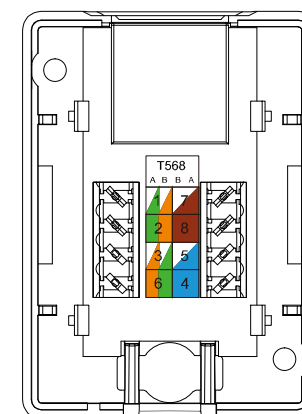
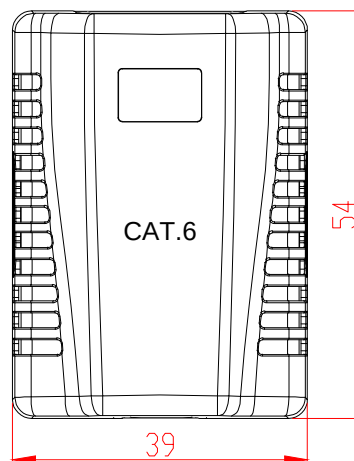
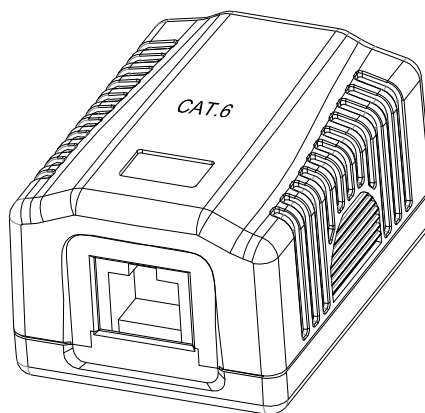
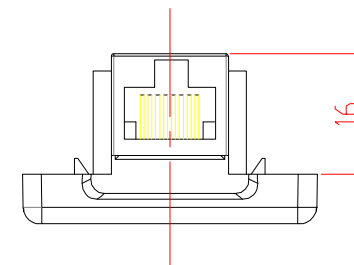
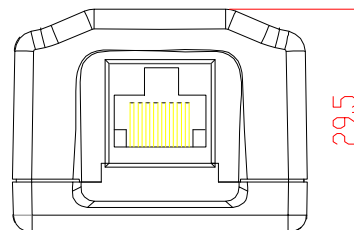
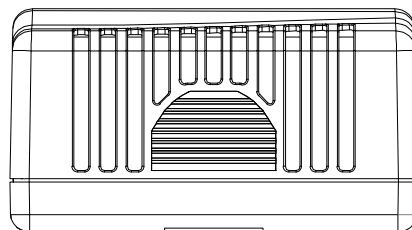




NOTES:

ELECTRICAL:



1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO+85°
2. OPERATION:0° TO70°

MECHANICAL:

1. PANEL FRAME:ZINC ALLOY
2. MOLDED CASE:ABS ;
3. IDC MATERIAL:PC ,CONTACT:PHOSPHOR BRONZE;
WITH NICKEL PATING ;
4. RJ45 JACK LIFE:750 TIMES MIN;
5. IDC LIFE:200 TIMES MIN;
6. WIRE:AWG 23-26;

											
					Material					Item No.	235213
SYM	Number	Bill No. of Alteration	Signature	Date	Angles Projection		Size	Scale	Unit	Part Name	1-Port Cat.6 Surface Moun Box
							A4	X:1	mm		
Drawn	Ding jian bo	2015.12.28	Tolerance				A4	X:1	mm	ERP	
Checked	Ge pei jun	2015.12.28	0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20								
Approved	Wang wei jun	2015.12.28	100.00-Angle ±0.25 ±30'								
					Sheet		1 OF 1	Version: A/0		Part No.	