


HVE-9211PR HDBaseT HDMI over Cat.5 PoE Receiver

Product Images

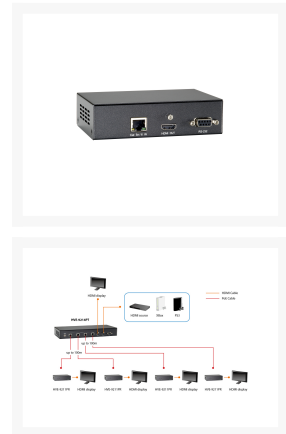

Short Description

- Supports Dolby TrueHD, DTS-HD Master Audio, Dolby Digital Plus, LPCM 7.1 audio
- Transmission distance of up to 100m for HDMI(4k2k), IR and RS-232
- Transmission distance of up to 100m for HDMI(4k2k), IR and RS-232
- Supports video resolutions up to 3840 x 2160 (4K x 2K) @ 30Hz
- Bi-Directional RS-232 pass through and IR control
- Supports 3D, CEC & Lip Sync pass-through
- Built-in EDID Hot Plug Detection (HPD)
- Simple Plug and Play installation
- HDMI outputs with EDID management
- HDMI and HDCP complaint

Description

The HVE-92 series is a HDMI extension solution supports HDBaseT technology which transmits HDMI signal and multi-channel audio at resolution Ultra HD 4K x 2K (3840 x 2160 @ 30Hz) and 1080p Full HD up to 100m via Cat5e or Cat6 cable. The series of products are embedded with EDID priority management of HDMI outputs supports EDID Hotplug refreshing function. These products also provide Bi-Directional RS-232 and IR to control the connected devices from either source or display location. All the features are made to simplify installation and reduce costs, but at the same time providing exceptional video and audio quality. The HVE-92 series is the perfect solution for Digital Signage, trade shows, home theater installations, medical facilities, and other public exhibitions.

Additional Information

Harmonized System (HS) code.	851762
Customs product code (TARIC).	8517620000
Dimensions (W x D x H).	125 x 85 x 40 mm
Product weight (kg).	0,407
Power supply included.	No
Operating humidity.	10% RH ~ 80% RH
Operating temperature.	0°C ~ 50°C
Package Contents.	HVE-9211PR IR-Fernbedienung Bedienungsanleitung
Color.	Black
EAN.	4015867192931
Model Number.	HVE-9211PR

