



# 608030 Cat 8.1 S/FTP Patch Cable, LSOH, Blue color, 1.0m

### **Product Images**



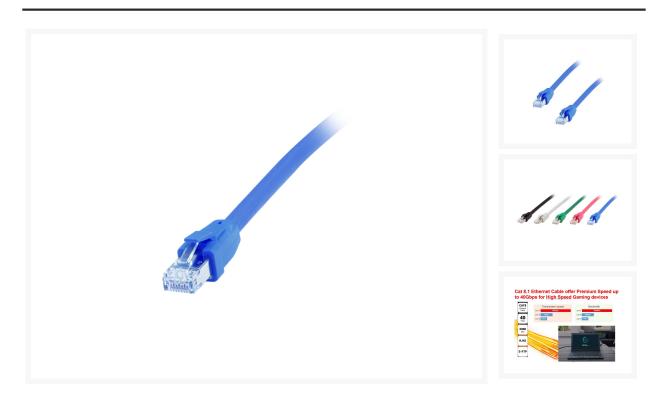

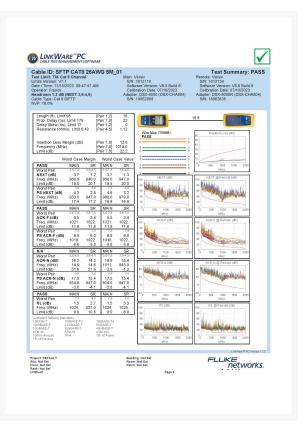



#### **Short Description**

- 4 x 2 x AWG 26/7
- Gold Plated Connectors for high signal quality
- Stranded bare copper conductor
- Foil and braid shield reduces EMI/RFI interference
- PIMF (pairs in metal foil)
- 2000 MHz transmission Bandwidth
- Transmission: 25Gbit, 40Gbit
- interference PoE++ compatible
- RoHS compliant
- Low Smoke Zero Halogen (LSZH/LSOH)
- Compliant with ISO/IEC 11801 and EN 50173

#### **Description**

The equip® Cat 8.1 S/FTP Patch Cable is a high-performance networking cable designed to deliver exceptional data transmission and power capabilities. With its Low Smoke Zero Halogen (LSOH) jacket, it ensures safety by producing minimal smoke and toxic fumes in case of fire. Operating at a staggering frequency of 2000MHz, this cable supports rapid data rates of up to 25Gbps/40Gbps, making it suitable for high-bandwidth applications such as 4K video streaming, online gaming, and data-intensive tasks.

One standout feature is its Power over Ethernet (PoE++) capability, enabling the cable to transmit both data and high levels of electrical power, perfect for devices like advanced security cameras and wireless access points. Whether in a professional IT setting or a home network environment, the Cat 8.1 S/FTP Patch Cable guarantees reliable and efficient connectivity with enhanced data speed and power delivery, making it an excellent choice for demanding networking needs.

3

## **Additional Information**

Harmonized System (HS) code.	854442
Customs product code (TARIC).	8544421000
Angled Plug.	No
Shielded.	Yes
Shielding.	S/FTP
Connector 1.	RJ45 male
Connector 2.	RJ45 male
Category.	Cat 8.1
Conductor material.	Copper
Conductor size (AWG).	26AWG
Cable Jacket material.	LSZH
Approval and Compliance.	ROHS
Package Contents.	Cat 8.1 S/FTP Patch Cable
Color.	Blue
EAN.	4015867223482
Model Number.	608030
Cable Length.	1m
Dimensions (W x D x H).	8 x 8 x 1000 mm
Product weight (kg).	0,0856

4

