


FPS-1033 Print Server

Product Images

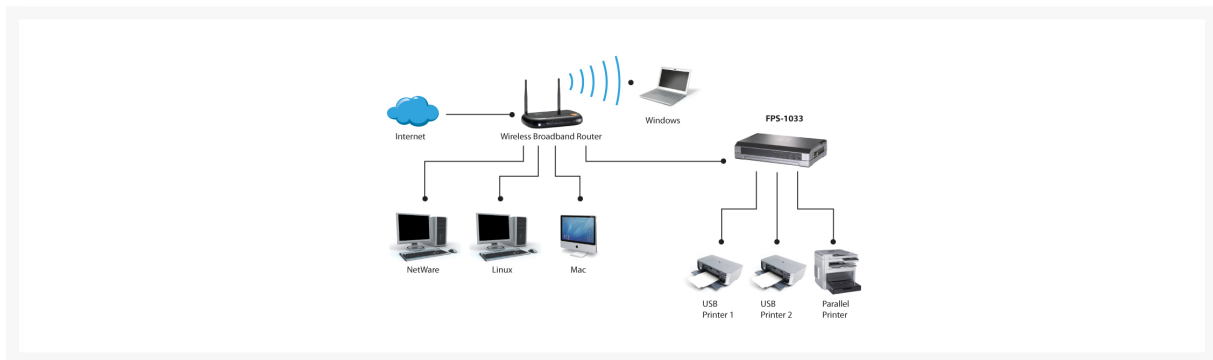

Short Description

- Multi-Port print server for network print sharing
- USB 2.0 interface
- Simple setup with user-friendly interface
- Support multiple network printing protocols
- Support multiple operating systems

Description

Product Overview The LevelOne FPS-1033 print server is an ideal network printing solution for small offices, home offices, schools and other businesses that require printer sharing over the same network. The FPS-1033 is a multi-port Fast Ethernet Print Server and provides network printer sharing for both USB and Parallel printers.

Multi Printer Support The FPS-1033 Multi Port print server provides simultaneous connectivity to two USB and one Parallel printers. It supports the USB 2.0 standard for high-speed printing.

Multi OS and Network Printing Protocol Support The FPS-1033 Multi Port Print Server supports Windows ME, 2000, 2003 and XP operating systems as well as Mac OS 8.1 and higher and UNIX/Linux and Netware (Bindery/NDS). Network Print Protocol supported includes TCP/IP, IPX, NetBEUI, AppleTalk, LPR, SMB over TCP/IP and IPP for flexible use with different network clients connected to the same office network.

Easy Installation Wizard The LevelOne FPS-1033 is easily configurable using a Web Browser or Windows based configuration program included with the CD-ROM. The print server is easily managed through a Web based user interface and the firmware is upgradeable through TFTP, the windows set-up program or the Web based user interface.

Additional Information

Fast Ethernet RJ45	1
Parallel	D-sub 25-pins Female
Harmonized System (HS) code.	851762
Customs product code (TARIC).	8517620000
Color.	Grey
EAN.	4015867142240
Model Number.	FPS-1033
Features.	Network Print Protocol Support : TCP/IP, IPX, NetBEUI, AppleTalk, LPR, SMB over TCP/IP, Internet Printing Protocol (IPP), RAW
Printer Interface.	Hybird
Dimensions (W x D x H).	180 x 100 x 35 mm
Product weight (kg).	255
Approval and Compliance.	CE, FCC Class B
Operating humidity.	0% RH ~ 70% RH
Operating temperature.	0°C ~ 50°C
Compatible operating systems.	Windows ME, 2000, XP , Vista, 7 Mac OS 8.1 or higher UNIX/Linux
Storage humidity.	0% RH ~ 80% RH
Storage temperature.	-5°C ~ 65°C
Package Contents.	FPS-1033 Netzadapter Quick Installation Guide Ressource CD (Bedienungsanleitung, Hilfsprogramm, Treiber)
Indicators.	Power/Status, Link, Activity
Power supply.	Power adapter
Power supply included.	Yes
Standard.	IEEE 802.3 10Mbps Ethernet IEEE 802.3u 100Mbps Fast Ethernet

