
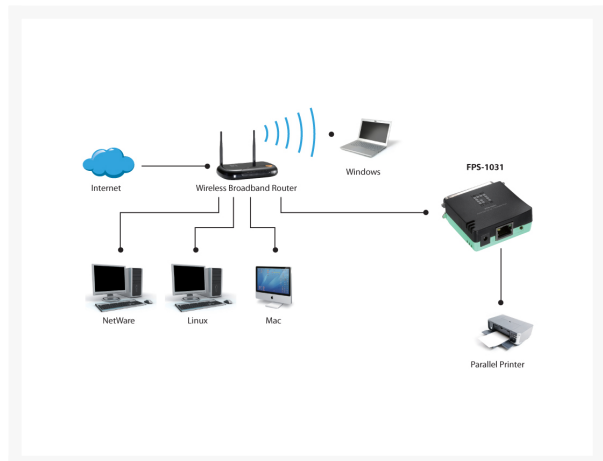


FPS-1031, Parallel Print Server

Product Images

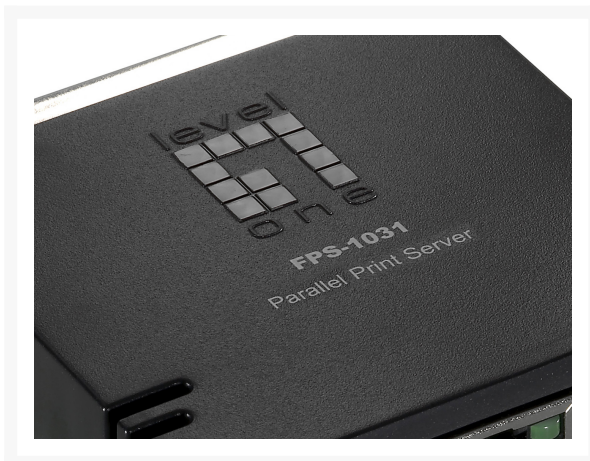

Short Description

- Parallel print server for network print sharing
- Simple setup with user-friendly interface

- Support multiple network printing protocols
- Support multiple operating systems

Description

Product Overview

The LevelOne FPS-1031 print server is an ideal network printing solution for small offices, home offices, schools and other businesses that require printer sharing over the same network. This print server is equipped with a 10/100Mbps autosensing Ethernet port and a DB-36-pin male bi-directional Centronic port that connects to parallel printers.

Multi OS and Network Printing Protocol Support

The FPS-1031 is a print server with 1 parallel port that supports Windows 7, 8 and 10 operating systems as well as Mac OS 8.1 and higher, UNIX/Linux and Netware (Bindery/NDS).

Network Protocol supported includes TCP/IP, IPX, NetBEUI, AppleTalk, LPR and SMB over TCP/IP for flexible use with different network clients connected to the same office network. The FPS-1031 also includes Internet Printing Protocol (IPP) support and Windows Print Monitor Technology to monitor printing jobs received.

Easy Installation Wizard

The LevelOne FPS-1031 is easily configurable using a Web Browser or the Windows based configuration program included with the CD-ROM. The print server is easily managed through a Web based user interface and the firmware is upgradeable through TFTP, the Windows set-up program or the Web based user interface.

Additional Information

Fast Ethernet RJ45	1
Parallel	D-sub 25-pins Female
Harmonized System (HS) code.	851762
Customs product code (TARIC).	8517620000
Color.	Black
EAN.	4015867142226
Model Number.	FPS-1031
Features.	Network Print Protocol Support : LPR,RAW, TCP, IPP, SMB, AppleTalk Netware Bindery/NDS, Print Monitor, Bonjour printing
Printer Interface.	Parallel
Dimensions (W x D x H).	55 x 51 x 25 mm
Product weight (kg).	0,56
Approval and Compliance.	CE, FCC, RoHS
Operating humidity.	0% RH ~ 70% RH
Operating temperature.	0°C ~ 50°C
Compatible operating systems.	Windows ME/2000/XP/Vista Mac OS 8.1 and higher UNIX/Linux and Netware (Bindery/NDS).
Storage humidity.	0% RH ~ 80% RH
Storage temperature.	-5°C ~ 65°C
Package Contents.	FPS-1031 Netzadapter Quick Installation Guide Ressource CD (Bedienungsanleitung, Hilfsprogramm, Treiber)
Indicators.	Power LAN
Power supply.	Power adapter
Power supply included.	Yes
RAM size.	2Mbytes SDRAM
Standard.	IEEE 802.3, 802.3u Ethernet Standards

