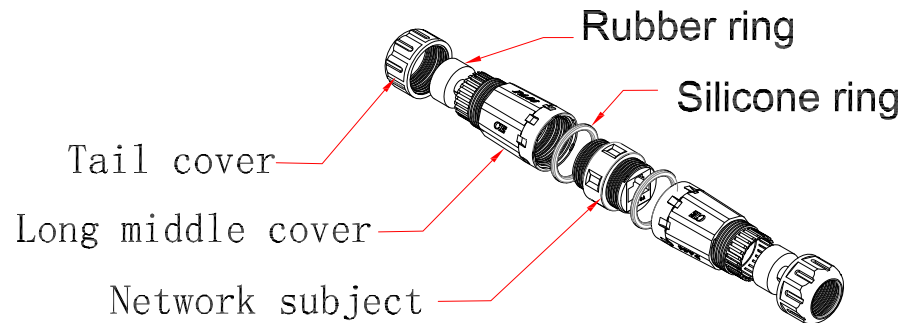
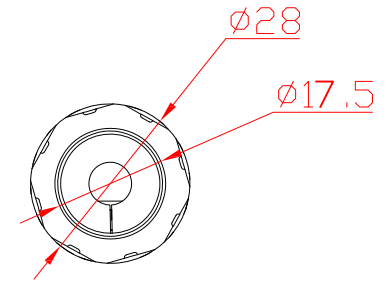
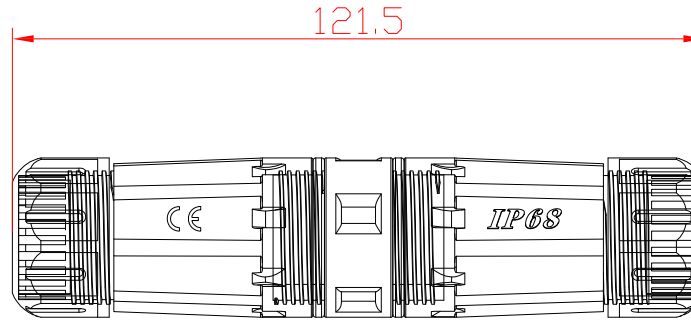
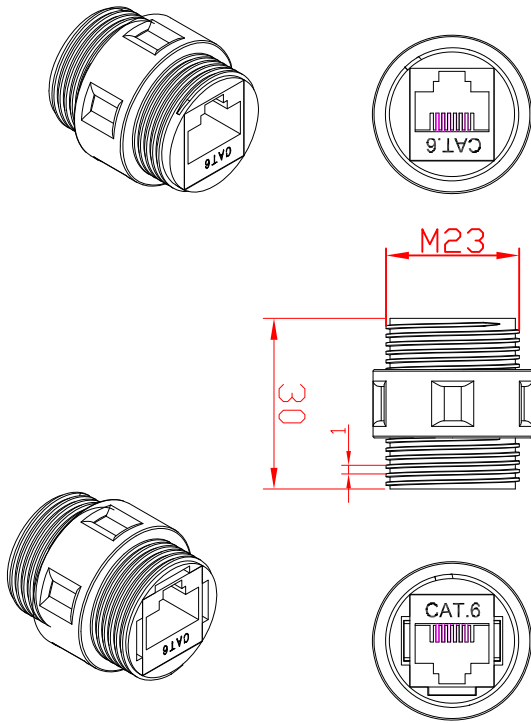



- NOTES :
- ELECTRICAL:
1. VOLTAGE RATING:125 VAC RMS
 2. CURRENT RATING:1.5AMP
 3. CONTACT RESISTANCE:100MILLIOHMS MAX
 4. INSULATION RESISTANCE:1000 MEGOHMS MIN@500VDC
 5. DIELECTRIC STRENGTH:750VACRMS60H, 1MIN
- ENVIRONMENTAL :
1. STORAGE:-40° TO +85°
 2. OPERATION:0° TO +70°
 3. Operate in stationary conditions from -40° TO + 85°
- MECHANICAL:
1. HOUSING MATERIAL:PA66
 2. INSERT MATERIAL:FAME RETARDANCY PBT
 3. PCB MATERIAL:FR-4 T=1.6mm
 4. RJ45 JACK CONTACT:PHOSPHOR BRONZE WITH NICKEL PATING GOLD PLATED(3U/6U/15U/30U/50U)
 5. RJ45 JACK LIFE:750 TIMES MIN
 6. IP68 resistant approval
 7. Suitable for cable diagram 4.5-7.5mm

													
SYM	Number	Bill No.of Alteration	Signature	Date	Material					Item No.	221162		
					Angles Projection		Size	Scale	Unit	Part Name		Cat.6 Outdoor RJ45 Inline Coupler	
Drawn	Kevin	2019.3.5	Tolerance			A4	X:1	mm	ERP Part No.				
			0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00-Angle ±0.25 ±30°										
Approved	Wang wei jun	2019.3.5								Sheet		1 OF 1	Version: A/0