
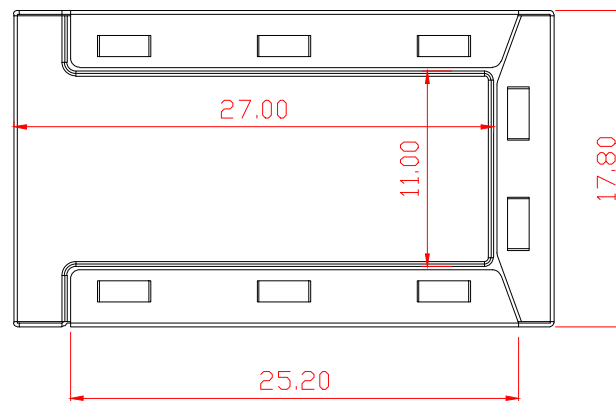
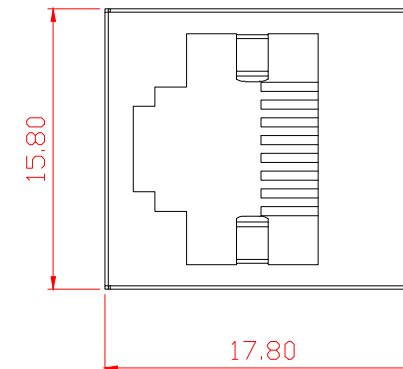


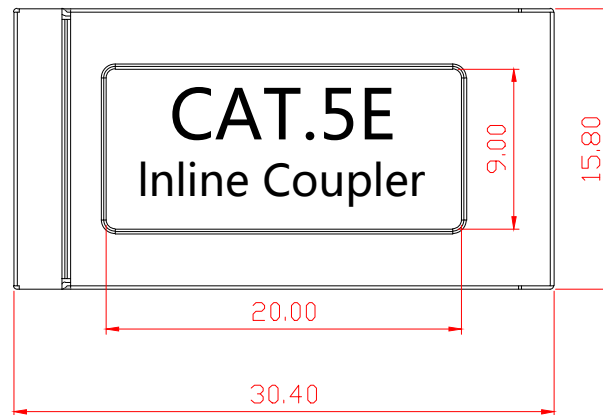

NOTES:

ELECTRICAL:



1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 100 MILLIOHMS MAX
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz, 1 MIN

ENVIRONMENTAL:

1. STORAGE: -40° TO +85°
2. OPERATION: 0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL: SUS304
2. PCB MATERIAL: FR-4 T=1.0mm
3. CONTACT MATERIAL: PHOSPHOR BRONZE
STAMP PIN T=0.30mm
4. RJ45 JACK ; IFE: 750 TIMES MIN

										
					Material		94V-0 ABS		Item No.	221161
SYM	Number	Bill No. of Alteration	Signature	Date	Angles Projection		Size	Scale	Unit	Part Name
Drawn	Ding jian bo	2015.12.11	Tolerance				A4	X:1	mm	
Checked	Ge pei jun	2015.12.11	0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00- ±0.25 Angle ±30'				A4	X:1	mm	ERP
Approved	Wang wei jun	2015.12.11								Sheet