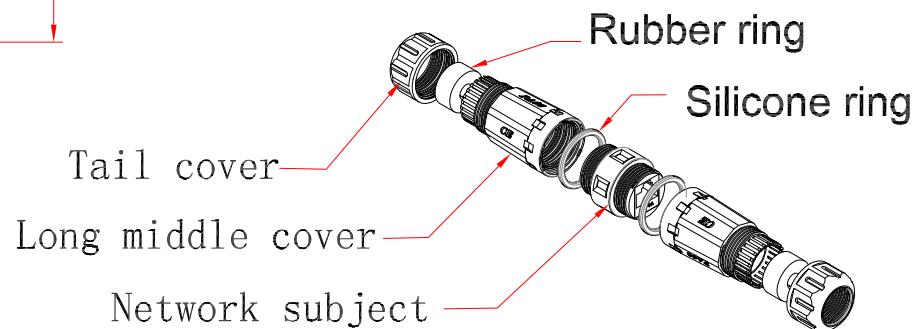




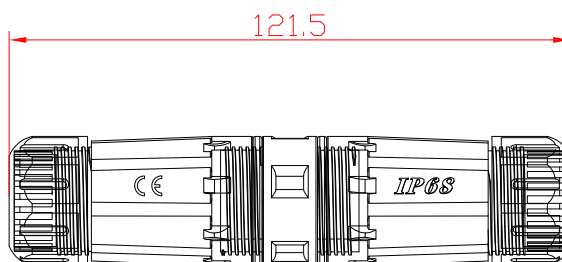



NOTES :

ELECTRICAL:

- 1.VOLTAGE RATING:125 VAC RMS
- 2.CURRENT RATING:1.5AMP
- 3.CONTACT RESISTANCE:100MILLIOHMS MAX
- 4.INSULATION RESISTANCE:1000 MEGOHMS MIN@500VDC
- 5.DIELECTRIC STRENGTH:750VACRMS60H, 1MIN

ENVIRONMENTAL :

- 1.STORAGE:-40° TO +85°
- 2.OPERATION:0° TO +70°
- 3.Operate in stationary conditions from -40° TO + 85°

MECHANICAL:

- 1.HOUSING MATERIAL:PA66
- 2.INSERT MATERIAL:FAME RETARDANCY PBT
- 3.PCB MATERIAL:FR-4 T=1.6mm
- 4.RJ45 JACK CONTACT:PHOSPHOR BRONZE WITH NICKEL PATING GOLD PLATED(3U/6U/15U/30U/50U)
- 5.RJ45 JACK LIFE:750 TIMES MIN
- 6.IP68 resistant approval
- 7.Suitable for cable diagram 4.5-7.5mm

										
									Item No.	221172
									Part Name	Cat.6A Outdoor RJ45 Inline Coupler
									ERP Part No.	
SYM	Number	Bill No.of Alteration	Signature	Date	Material	Angles Projection	Size	Scale	Unit	
Drawn	Kevin	2019.3.5		Tolerance			A4	X:1	mm	
				0.00-20.00 ±0.10						
				20.00-30.00 ±0.15						
				30.00-100.00 ±0.20						
				100.00- Angle ±0.25						
Approved	Wang wei jun	2019.3.5			Sheet	1 OF 1	Version: A/0			