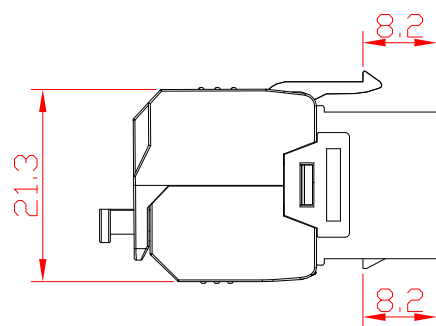
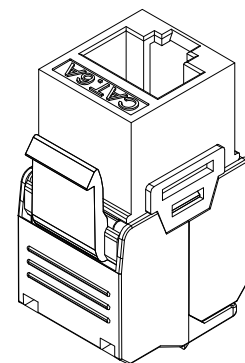


NOTES:

ELECTRICAL:



1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL:PC
2. INSERT MATERIAL:FAME RETARDANCY PBT
3. PCB MATERIAL:FR-4 T=1.6mm
4. CONTACT MATERIAL:PHOSPHOR BRONZE STAMP
PIN T=0.30mm
5. IDC CONTACT MATERIAL:PHOSPHOR BRONZE
T=0.50mm WITH TIN PLATING
6. RJ11 JACK ;LIFE:750 TIMES MIN
7. IDC LIFE:200 TIMES MIN
8. WIRE:AWG 22-26

											
					Material					Item No.	769227
SYM	Number	Bill No. of Alteration	Signature	Date	Angles Projection		Size	Scale	Unit	Part Name	Cat. 6A Unshielded Keystone Jack Toolfree
							A4	X:1	mm		
Drawn	Ding jian bo	2015.12.29	Tolerance				A4	X:1	mm	ERP	Part No.
Checked	Ge pei jun	2015.12.29	0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00-Angle ±0.25 ±30'								
Approved	Wang wei jun	2015.12.29									
					Sheet	1 OF 1		Version: A/0			